


IRONERS

TFI 3218 · 6015 · 6020 · 6025

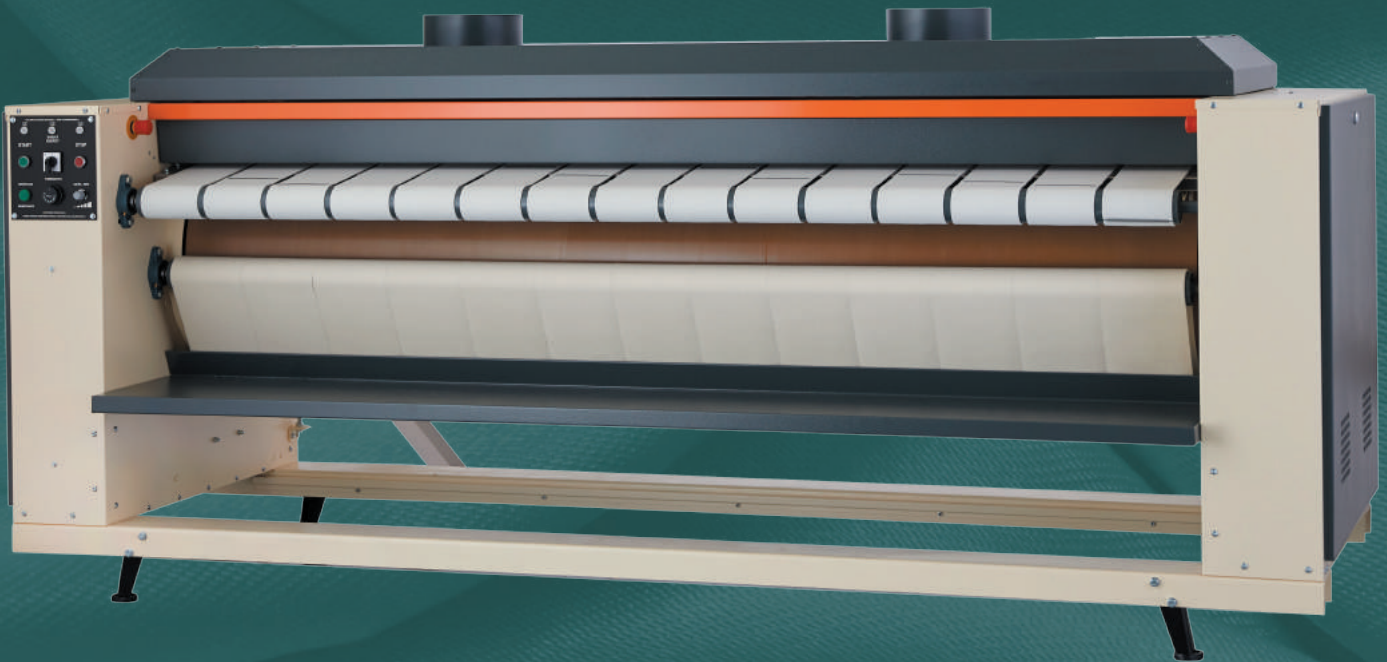

STANDARD FEATURES & BENEFITS

- Ergonomic roller heated iron
- Steam or electric heating
- Faster ironing thanks to the expanded heat transfer surface
- Pressure rollers providing excellent ironing quality
- Finger protection model and emergency button providing more security
- Easy-to-use manual control panel
- Frequency controlled motor
- Space-saving, wall-mounted model that allows laundry to be taken from the front

TOLON

IRONERS

TFI 3218 - 6015 - 6020 - 6025

MODEL	UNIT	TFI 3218	TFI 6015	TFI 6020	TFI 6025
Roll diameter	mm	320	600	600	600
Working width	mm	1710	1500	1910	2500
Roll speed	m/min	4-9	4-9	4-9	4-9
Performance	kg/h	30-35	60-70	70-80	90-100
HEATING					
Electric					
Electric heating power *	kW	12	24	24	24
Electric consumption	kW/h	12,2	24,4	24,4	24,4
Steam					
Steam connection Ø	DN	-	20-¾"	20-¾"	20-¾"
Steam consumption	m³/h	-	50	70	100
VOLTAGE/ELECTRIC CONNECTION					
Electric					
	3ph 50Hz		200/220/230/240/380/400/415/480 V		
	3ph 60Hz		200/208/220/240/380/415/480V		
Steam					
	1ph 50Hz	-	200/220/230/240 V	200/220/230/240 V	200/220/230/240 V
	1ph 60Hz	-	200/208/220/240 V	200/208/220/240 V	200/208/220/240 V
MOTOR					
Roll motor	kW	0,37	0,37	0,37	0,37
EXHAUST					
Exhaust connection Ø	mm	250	250	250	2*250
Airflow					
Electric	m³/h	665	665	665	1330
Steam	m³/h	-	665	665	1330
DIMENSIONS (WxDxH)					
Standard	mm	2360 x 930 x 1430	2200 x 1070 x 1300	2715 x 1065 x 1300	3215 x 1065 x 1300
Packing	mm	2400 x 1000 x 1480	2300 x 1450 x 1450	2800 x 1170 x 1450	3300 x 1170 x 1450
WEIGHT					
Standard	kg	490	710	840	1200
Packed	kg	530	740	880	1250
SOUND LEVEL					
	db(A)	< 60	< 60	< 60	< 60

* Output calculated at 380V/IIIphase